

Safety Beam




- For added safety
- Easy to install
- Can be installed at 190° in limited spaces

Install vertically to a height of 30 cm at a distance of not less than 2m.
Avoid installing in direct sunlight.

Please ensure that the receiver and transmitter are properly aligned.

If two pairs of photocells are being used, ensure that the receiver is positioned on opposite sides in order to avoid interference.

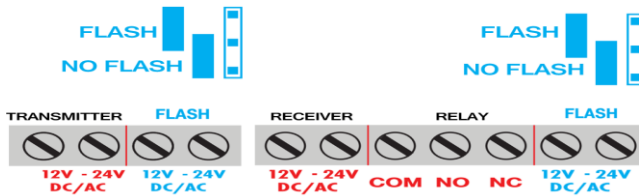

Technical specification:

Power supply	12- 24V DC/AC
Contact rating	Transmitter <35mA, flash <100mA Receiver <30mA, flash < 100mA
Ambient temperature	From -20 to + 60°C
Detection angle	+/- 5°
Range	Max 10m
IP	IP54

Size	128mm x 50mm x 33mm
Type of contacts	NC NO 1A/30VDC